


Non-Locking Flush "T" Handle with Adjustable Grip



- An extra turn adjusts the amount of compression applied
- T-handle folds into a recessed dish
- 90 degree clockwise (Type A) rotation to latch
- Steel or stainless steel construction
- Die cast zinc handle
- Models with mounting studs are supplied with mounting nuts and lockwasher
- Cup and housing are polished stainless steel or dacrotized steel finish
- Handle is dacrotized or chrome plated

▷ For optional gasket order part: 24-36-101-18

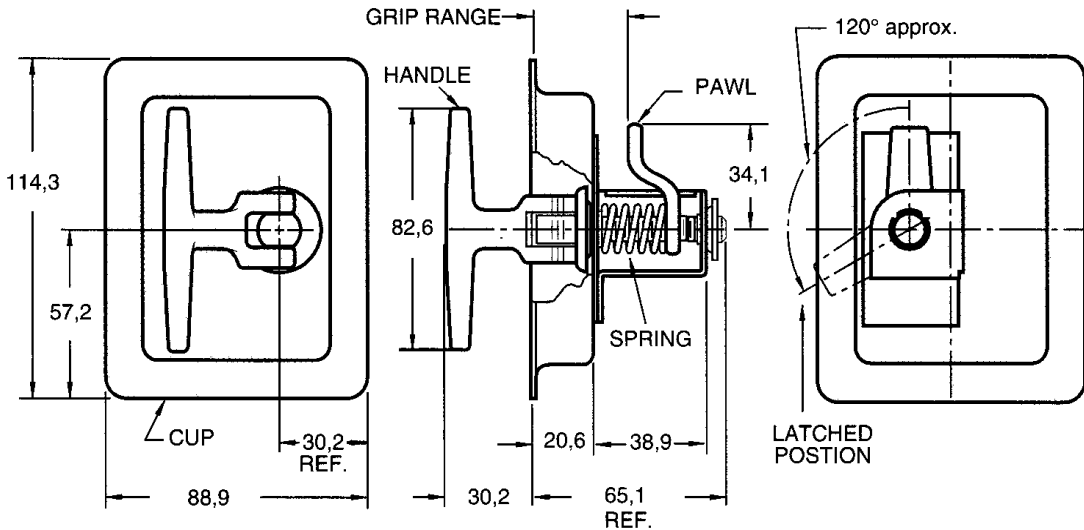



Panel Preparation

No. 24 Flush Latches with mounting studs

(mounting nuts and lockwashers supplied)

FLANGE GASKET
OPTIONAL

- 7,9 MAX. panel thickness
- Tightening torque of mounting nuts not to exceed 2,8 N•m

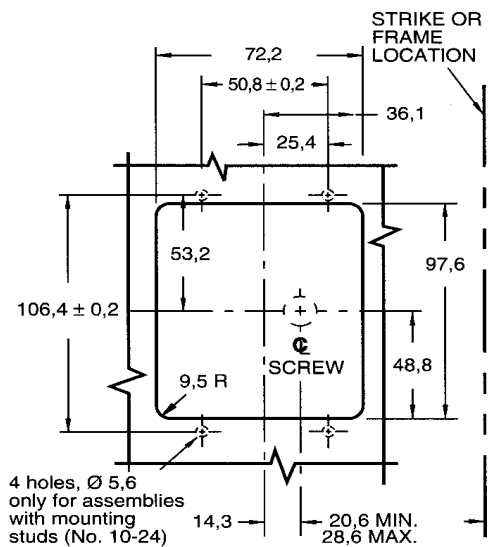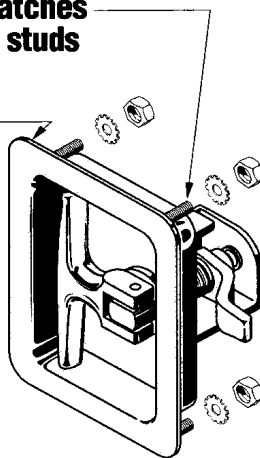

Grip Range		Part Numbers with Mounting Studs	
		Cup and Housing: Polished stainless steel, Handle: Die cast zinc, chrome plated.	Cup and Housing: Steel, dacrotized. Handle: Die cast zinc, dacrotized.
Min	Max	Type A	Type A
19.1	37.3	24-20-101-35	24-20-101-10
31.8	50.2	24-20-102-35	24-20-102-10
44.5	61.9	24-20-104-35	24-20-104-10